



D I O D E

D212-25, D212-25X

<ul style="list-style-type: none">◆ $V_{RRM} = \underline{100 - 1600 \text{ V}}$◆ $I_{F(AV)} = \underline{25 \text{ A}} (T_c = 150 \text{ }^\circ\text{C})$◆ $I_{FSM} = \underline{0,34 \text{ kA}} (T_j = 190 \text{ }^\circ\text{C})$		
<ul style="list-style-type: none">◆ Hermetic metal cases with glass insulators◆ Threaded studs of ISO		

MAXIMUM RATED VALUES

Parameter and conditions	Symbol	Values		Units
Repetitive peak reverse voltage, $T_j = -60 \dots + 190 \text{ }^\circ\text{C}$	V_{RRM}	100-1600		V
Non-repetitive peak reverse voltage, $T_j = -60 \dots + 190 \text{ }^\circ\text{C}$	V_{RSM}			
Repetitive peak reverse current, $T_j = 190 \text{ }^\circ\text{C}, V_R = V_{RRM}$	I_{RRM}	3		mA
Maximum average forward current, $f = 50 \text{ Hz}, T_c = 150 \text{ }^\circ\text{C}$	$I_{F(AV)}$	25		A
RMS forward current, $f = 50 \text{ Hz}, T_c = 140 \text{ }^\circ\text{C}$	I_{FRMS}			
Surge non-repetitive current, $T_j = 190 \text{ }^\circ\text{C}, V_R = 0, t_p = 10 \text{ ms}$	I_{FSM}	0,34		kA
Safety factor	I^2t	0,58		kA^2s
Operation junction temperature range	T_j	-60 to +190		°C
Storage temperature range	T_{stg}	-60 to +50		°C

ELECTRICAL CHARACTERISTICS

Parameter and conditions	Symbol	Values			Units
		min	typ.	max	
Maximum peak forward voltage, $T_j = 25 \text{ }^\circ\text{C}, I_F = 79 \text{ A}$	V_{FM}	-	-	1,35	V
On-state threshold voltage, $T_j = 190 \text{ }^\circ\text{C}, I_F = 39 - 119 \text{ A}$	V_{TO}	-	-	0,78	
On-state slope resistance, $T_j = 190 \text{ }^\circ\text{C}, I_F = 39 - 119 \text{ A}$	r_T	-	-	8,15	mΩ

**D212-25, D212-25X****THERMAL PARAMETERS**


Thermal resistance junction to case	$R_{th(j-c)}$	-	-	1,25	°C/W
Thermal resistance case to heatsink	$R_{th(c-h)}$	-	-	1,0	

MECHANICAL PARAMETERS

Weight	w	-	0,006	-	kg
Mounting torque	M_d	0,9	-	1,1	Nm



D212-25, D212-25X

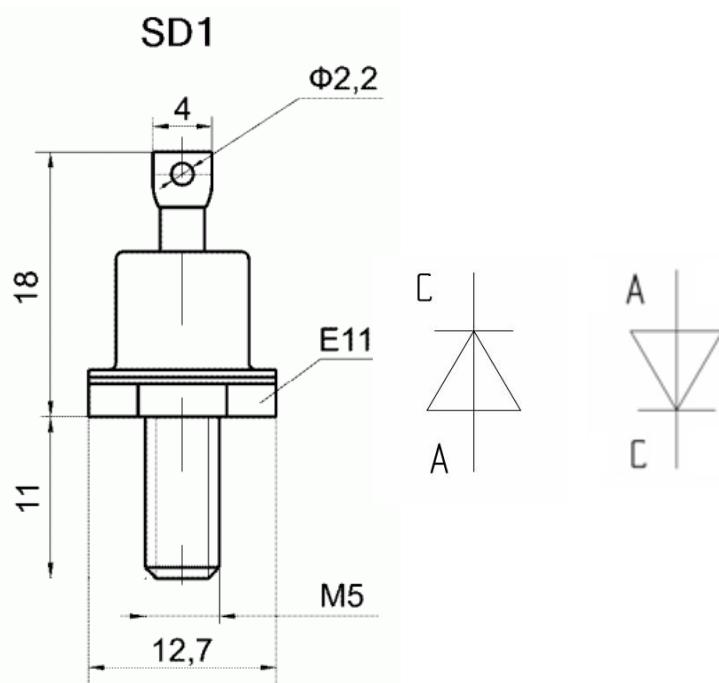

$$w = 6r$$
$$M_D = 0.9 - 1.1 \text{ Nm}$$

C – Cathode, A – Anode

Device Outline Drawing

(dimensions in mm)



126, Proletarskaya str.,
430001, Saransk, Republic Mordovia, Russia
Tel: +7(8342) 47-04-30
Tel/Fax: +7 (8342) 47-15-01
E-mail: vpruvs@elvpr.ru
Internet: www.elvpr.ru Internet: www.elvpr.ru