



## PHASE CONTROL THYRISTOR T373-1250

<ul style="list-style-type: none"> <li>◆ <math>V_{DRM} = \underline{3600 - 4400 \text{ V}}</math></li> <li>◆ <math>V_{RRM} = \underline{3600 - 4400 \text{ V}}</math></li> <li>◆ <math>I_{T(AV)} = \underline{1937 \text{ A}}</math> (<math>T_C = 70 \text{ }^\circ\text{C}</math>)</li> <li>◆ <math>I_{T(AV)} = \underline{1577 \text{ A}}</math> (<math>T_C = 85 \text{ }^\circ\text{C}</math>)</li> <li>◆ <math>I_{TSM} = \underline{32 \text{ kA}}</math> (<math>T_j = 125 \text{ }^\circ\text{C}</math>)</li> </ul>		
<ul style="list-style-type: none"> <li>◆ Amplifying gate</li> <li>◆ Low on-state switching losses</li> <li>◆ Acceptable for series and parallel connections</li> <li>◆ Low dispersion <math>Q_{rr}</math>, <math>V_{TM}</math></li> </ul>		

### MAXIMUM RATED VALUES

Parameter and conditions	Symbol	Values	Units
Repetitive peak off-state voltage, $T_j = -60 \dots +125 \text{ }^\circ\text{C}$	$V_{DRM}$	3600 - 4400	V
Repetitive peak reverse voltage, $T_j = -60 \dots +125 \text{ }^\circ\text{C}$	$V_{RRM}$	3600 - 4400	
Non-repetitive peak off-state voltage, $T_j = -60 \dots +125 \text{ }^\circ\text{C}$	$V_{DSM}$	3700 - 4500	
Non-repetitive peak reverse voltage, $T_j = -60 \dots +125 \text{ }^\circ\text{C}$	$V_{RSM}$	3700 - 4500	
Repetitive peak off-state current/ Repetitive peak reverse current, $T_j = 125 \text{ }^\circ\text{C}$ , $V_D / V_R = V_{DRM} / V_{RRM}$	$I_{DRM} / I_{RRM}$	200	mA
Average on-state current, $f = 50 \text{ Hz}$ , double side cooling, $T_C = 85 \text{ }^\circ\text{C}$ $T_C = 70 \text{ }^\circ\text{C}$	$I_{T(AV)}$	1577 1937	A
RMS on-state current, $T_C = 70 \text{ }^\circ\text{C}$ , $f = 50 \text{ Hz}$	$I_{TRMS}$	3041	A
Surge non-repetitive on-state current, $T_j = 125 \text{ }^\circ\text{C}$ , $V_R = 0$ , $t_p = 10 \text{ ms}$	$I_{TSM}$	32	kA
Safety factor	$I^2t$	$5.1 \cdot 10^6$	$A^2s$
Critical rate of rise of on-state current, $T_j = 125 \text{ }^\circ\text{C}$ , $V_D = 0.67V_{DRM}$ , $I_T = 2500 \text{ A}$ , $I_{FG} = 2 \text{ A}$ , $t_r = 1 \text{ } \mu\text{s}$ , $f = 50 \text{ Hz}$	$(di_T/dt)_{crit}$	200	$A/\mu\text{s}$
Critical rate of rise of off-state voltage, $T_j = 125 \text{ }^\circ\text{C}$ , $V_D = 0.67V_{DRM}$	$(dv_D/dt)_{crit}$	1600 - 2000	$V/\mu\text{s}$
Gate power loss, DC	$P_{GM}$	4	W
Operation junction temperature range	$T_j$	-60... +125	$^\circ\text{C}$
Storage temperature range	$T_{stg}$	-60... +50	




## T373-1250

ELECTRICAL CHARACTERISTICS					
Parameter and conditions	Symbol	Values			Units
		min	typ.	max	
Peak on-state voltage, $T_j = 25\text{ }^\circ\text{C}$ , $I_T = 3930\text{ A}$	$V_{TM}$	-	-	2.10	V
On-state threshold voltage, $T_j = 125\text{ }^\circ\text{C}$ , $I_T = 1960 - 5890\text{ A}$	$V_{T(TO)}$	-	-	1.10	
On-state slope resistance, $T_j = 125\text{ }^\circ\text{C}$ , $I_T = 1960 - 5890\text{ A}$	$r_T$	-	-	0.31	m $\Omega$
Delay time, $T_j = 25\text{ }^\circ\text{C}$ , $V_D = 0.67V_{DRM}$ , $I_T = 1250\text{ A}$ , $I_{FG} = 2\text{ A}$ , $t_r = 1\text{ }\mu\text{s}$	$t_d$	-	-	3.0	$\mu\text{s}$
Turn off-time, $T_j = 125\text{ }^\circ\text{C}$ , $I_T = 1250\text{ A}$ , $di_T/dt = -5\text{ A}/\mu\text{s}$ , $V_R \geq 100\text{ V}$ , $V_D = 0.67V_{DRM}$ , $dv_D/dt = 50\text{ V}/\mu\text{s}$	$t_q$	-	500	-	
Reverse recovery charge, $T_j = 125\text{ }^\circ\text{C}$ , $I_T = 1250\text{ A}$ , $di_T/dt = -5\text{ A}/\mu\text{s}$ , $V_R \geq 100\text{ V}$	$Q_{RR}$	-	-	3500	$\mu\text{As}$
Holding current, $T_j = 25\text{ }^\circ\text{C}$ , $V_D = 12\text{ V}$	$I_H$	-	-	300	mA
Latching current, $T_j = 25\text{ }^\circ\text{C}$ , $V_D = 12\text{ V}$ , $I_{FG} = 2\text{ A}$ , $t_r = 0.5\text{ }\mu\text{s}$	$I_L$	-	-	1500	
Gate trigger voltage, $V_D = 12\text{ V}$ , $T_j = -60\text{ }^\circ\text{C}$ $T_j = 25\text{ }^\circ\text{C}$ $T_j = 125\text{ }^\circ\text{C}$	$V_{GT}$	-	-	3.5 2.5 2.0	V
Gate trigger current, $V_D = 12\text{ V}$ , $T_j = -60\text{ }^\circ\text{C}$ $T_j = 25\text{ }^\circ\text{C}$ $T_j = 125\text{ }^\circ\text{C}$	$I_{GT}$	-	-	450 250 200	mA
Gate non-trigger direct voltage, $T_j = 125\text{ }^\circ\text{C}$ , $V_D = 0.67V_{DRM}$	$V_{GD}$	0.25	-	-	V
Gate non-trigger direct current, $T_j = 125\text{ }^\circ\text{C}$ , $V_D = 0.67V_{DRM}$	$I_{GD}$	15	-	-	mA
THERMAL PARAMETERS					
Thermal junction to case resistance, DC: double side cooled DC: anode side cooled DC: cathode side cooled	$R_{th(j-c)}$ $R_{th(j-cA)}$ $R_{th(j-cK)}$	-	-	0.011 0.022 0.022	$^\circ\text{C}/\text{W}$
Thermal case to heatsink resistance, double side cooled single side cooled	$R_{th(c-h)}$	-	-	0.003 0.006	
MECHANICAL PARAMETERS					
Weight	w	-	1.0	-	kg
Clamping force	F	40	-	60	kN
Maximum acceleration (at nominal mounting force)	a	-	-	100	m/s <sup>2</sup>
Minimal gate-anode distance on insulator surface	$D_s$	-	38.6	-	mm



## T373-1250

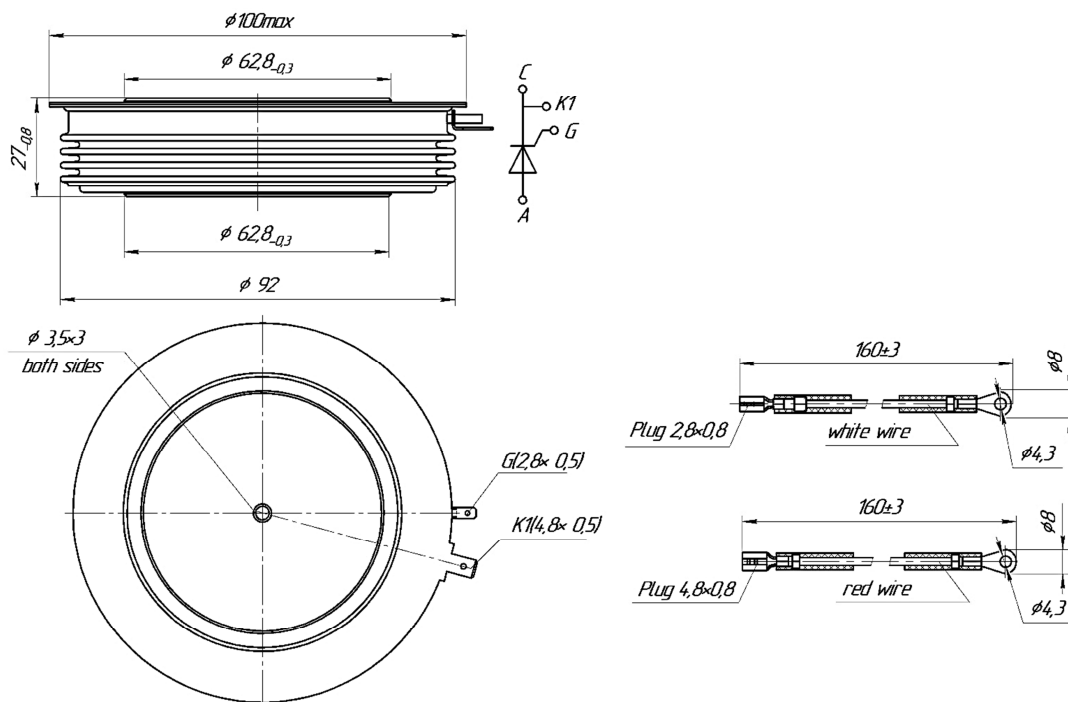

**Device Outline Drawing**  
(dimensions in mm)



126, Proletarskaya str.,  
430001, Saransk, Republic Mordovia, Russia  
Tel: +7(8342) 47-04-30  
Tel/Fax: +7 (8342) 47-15-01  
E-mail: vpruvs@elvpr.ru  
Internet: www.elvpr.ru